

Gas Regulator Included

- Two adjustable oven racks easily removable

| Model | Gas | Ovens | Burners |
|-------|------------|-------|---------|
| VIOR6 | LP/Propane | 1 | 6 |



COMMERCIAL COOKING

Vionet Commercial Gas Range has powerful Planck 30,000 BTU cast iron burners. Each burner has an individual pilot light - heavy duty 12" X 12" removable cast iron grate and individual instant light control knob. It is constructed with a stainless steel front, 24.75" high backriser and shelf, 6" adjustable stainless steel legs or casters and a 3/4" NPT gas connection.

The standard oven is powered with a 30,000 BTU burner and comes with two easy to remove oven racks. It includes a porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 250° F - 550° F and is equipped with a flame failure safety device. Units are shipped for LP (propane) gas but are easily converted to natural gas with a conversion kit that isn't included.




STANDARD FEATURES

- 30,000 BTU cast iron burner with individual pilot lights
 - Heavy duty 12" x12" removable cast iron grates
 - Instant light flame adjustable control knobs
- Full Size Oven
 - 30,000 BTU oven burner
 - Cool to touch oven door handle
 - Two adjustable oven racks easily removable
 - Compression spring door system
 - Flame failure safety device
 - Adjustable thermostat: 250°F - 550°F
 - VR6 hold full size sheet pans Construction
- Heavy duty steel frame
 - Stainless Steel front -24.75" high backriser and shelf
 - Removable crumb tray under the top burners
 - 6" adjustable Stainless steel legs or casters
 - 3/4" NPT gas connection

Warranty: Vionet limited parts and labor warranty takes effect from 1 year after end user purchase.

DETAILS AND DIMENSIONS

- A convertible 3/4" NPT appliance pressure regulator is provided with this unit and set for:
Natural Gas 4.0" W.C.
Propane Gas 10.0" W.C.
- If using a commercial flec it must comply with ANZI Z 21.69
- All equipment is supplied for LP (Propane) Gas, natural conversion kit isn't included.
- Rear Gas Connections is 3/4" NPT
- Recommended incoming pressure:
Natural Gas 4.5" W.C. with not more than a 1/2" W.C. pressure drop
LP Gas 10.5" W.C. with not more than a 1/2" WC. pressure drop

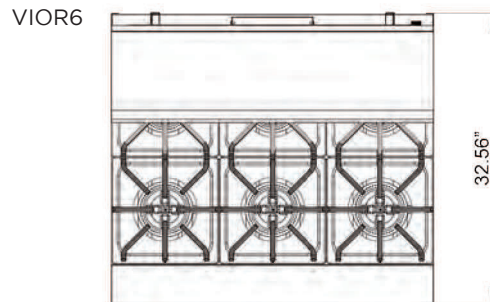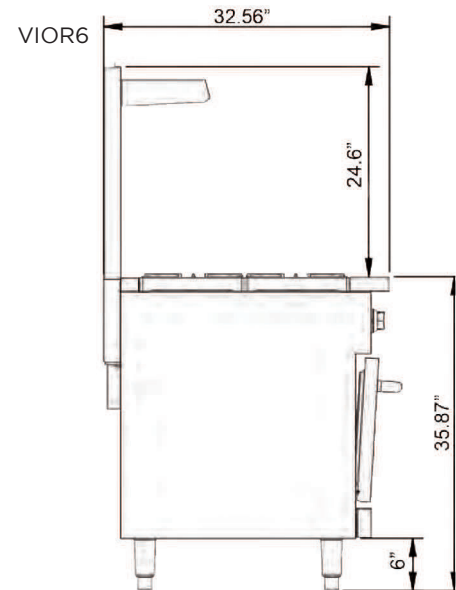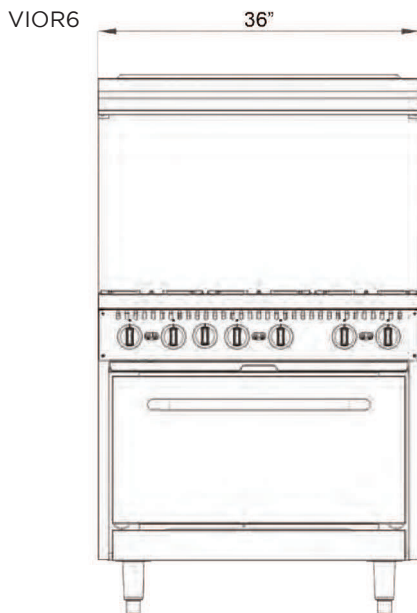

| Model | Burners | Dimensions | | | Dimensions | | | BTU's (per burner) | BTU's (per oven) | Total BTU's | Crated Weight (lbs) |
|-------|---------|------------|-------|-----------|------------|------|------|-----------------------|---------------------|----------------|------------------------|
| | | W | D | H | W | D | H | | | | |
| VIOR6 | 6 | 36 | 32.56 | 35.9+24.6 | 20.8 | 25.8 | 13.7 | 30,000 | 30,000 | 210,000 | 455 |

As continued product improvement is a policy of Vionet, specifications are subject to change.