



Model	Doors	Capacity (cu.ft)
VIOCR1-ES-HC	1	23
VIOCR2-ES-HC	2	49
VIOCR3	3	72
VIOCF1-HC	1	23
VIOCF2-HC	2	49

### STANDARD FEATURES


- Solid state thermostat with digital display
- Stainless steel front and sides
- Field reversible 1-door units
- 3 heavy duty baked epoxy racks per door
- Self closing doors remain open past 90°
- Non twist solid mullions on 2 & 3 door units
- Environmentally friendly R290
- EZ slide out condenser
- Full length integrated door handle
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides and 1" back
- [ES- Energy Star approval \(only selected models\)](#)
- 2 year limited warranty



Or



Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / ABS liner	Approvals	UL-EPH
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Powder coated aluminum white	Refrigerant	(VCR) R134a; (VCF) R404a
Interior floor	Stainless steel	Temperature range	(VCR) 35°-41°F; (VCF) 0° to -10°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted

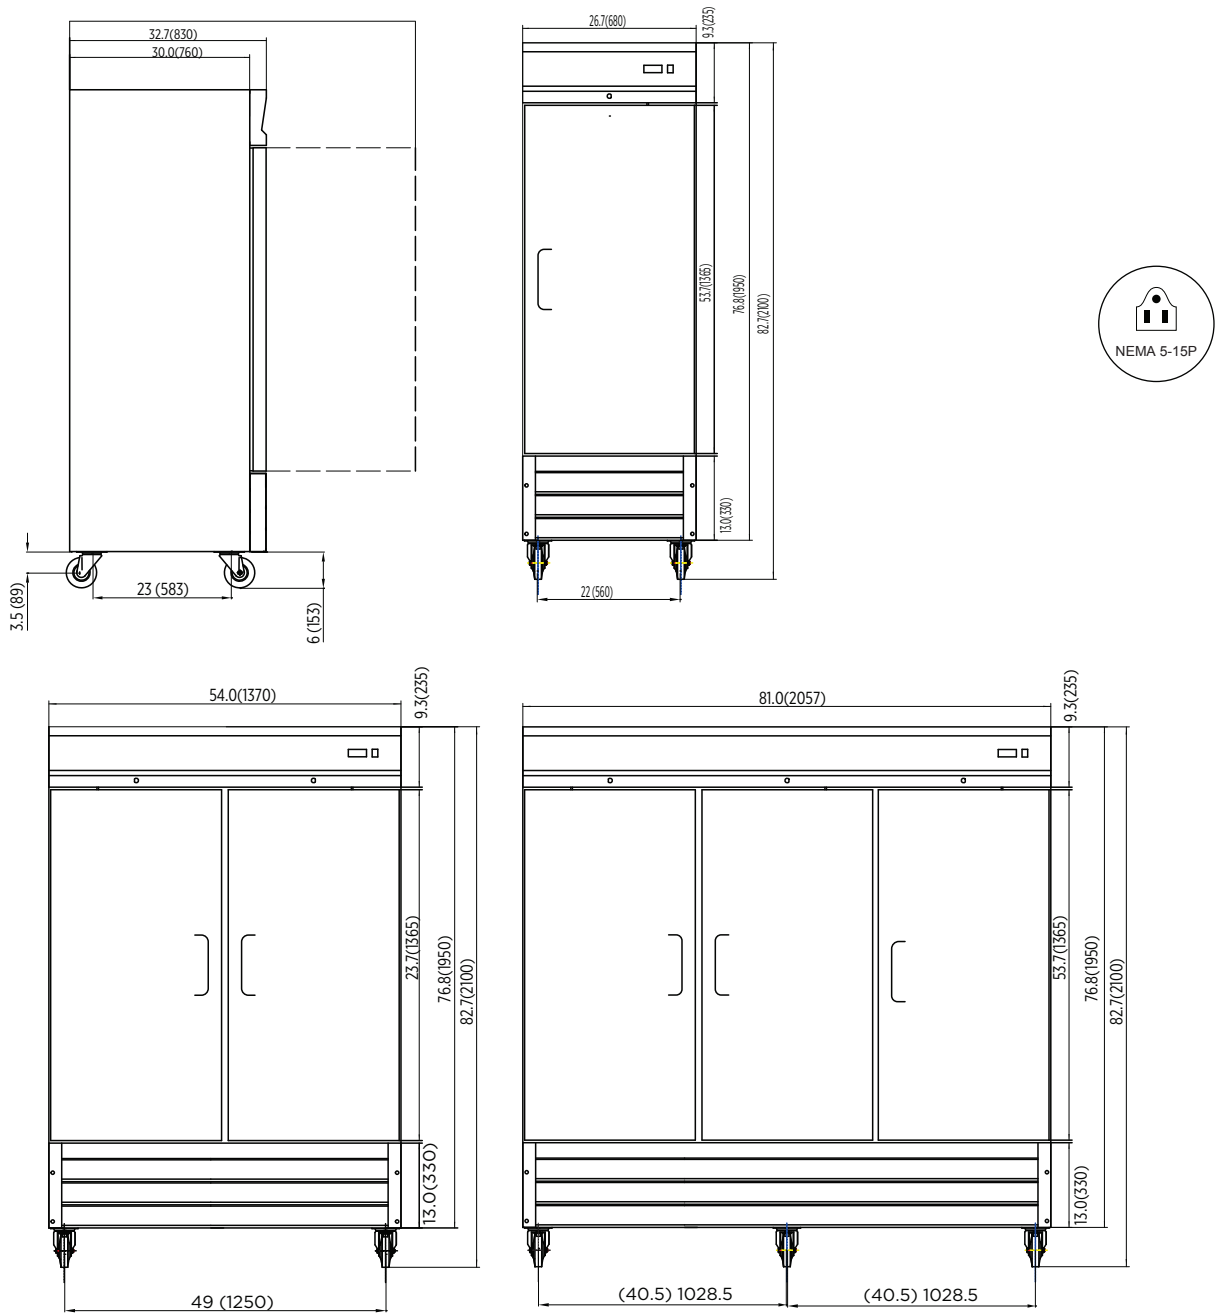

Model	Doors	Capacity (cu.ft)	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
				L	D	H						
VIOCR1-ES-HC	1	23	3	27	33.7	82.7	3/8	115/60/1	3.8	5-15P	10	350
VIOCR2-ES-HC	2	49	6	54	33.7	82.7	1/2	115/60/1	5.7	5-15P	10	518
VIOCR3	3	72	9	81	33.7	82.7	3/4	115/60/1	10	5-15P	10	669
VCF1-HC	1	23	3	27	33.7	82.7	5/8	115/60/1	11	5-15P	10	364
VCF2-HC	2	49	6	54	33.7	82.7	1	115/60/1	12	5-15P	10	568

As continued product improvement is a policy of Vionet, specifications are subject to change.